


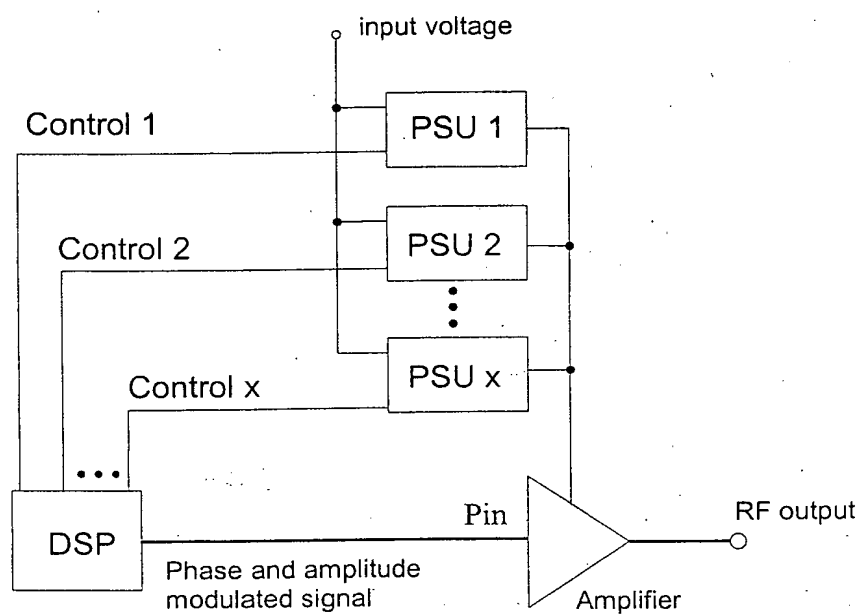
Fig. 1

Fig. 2

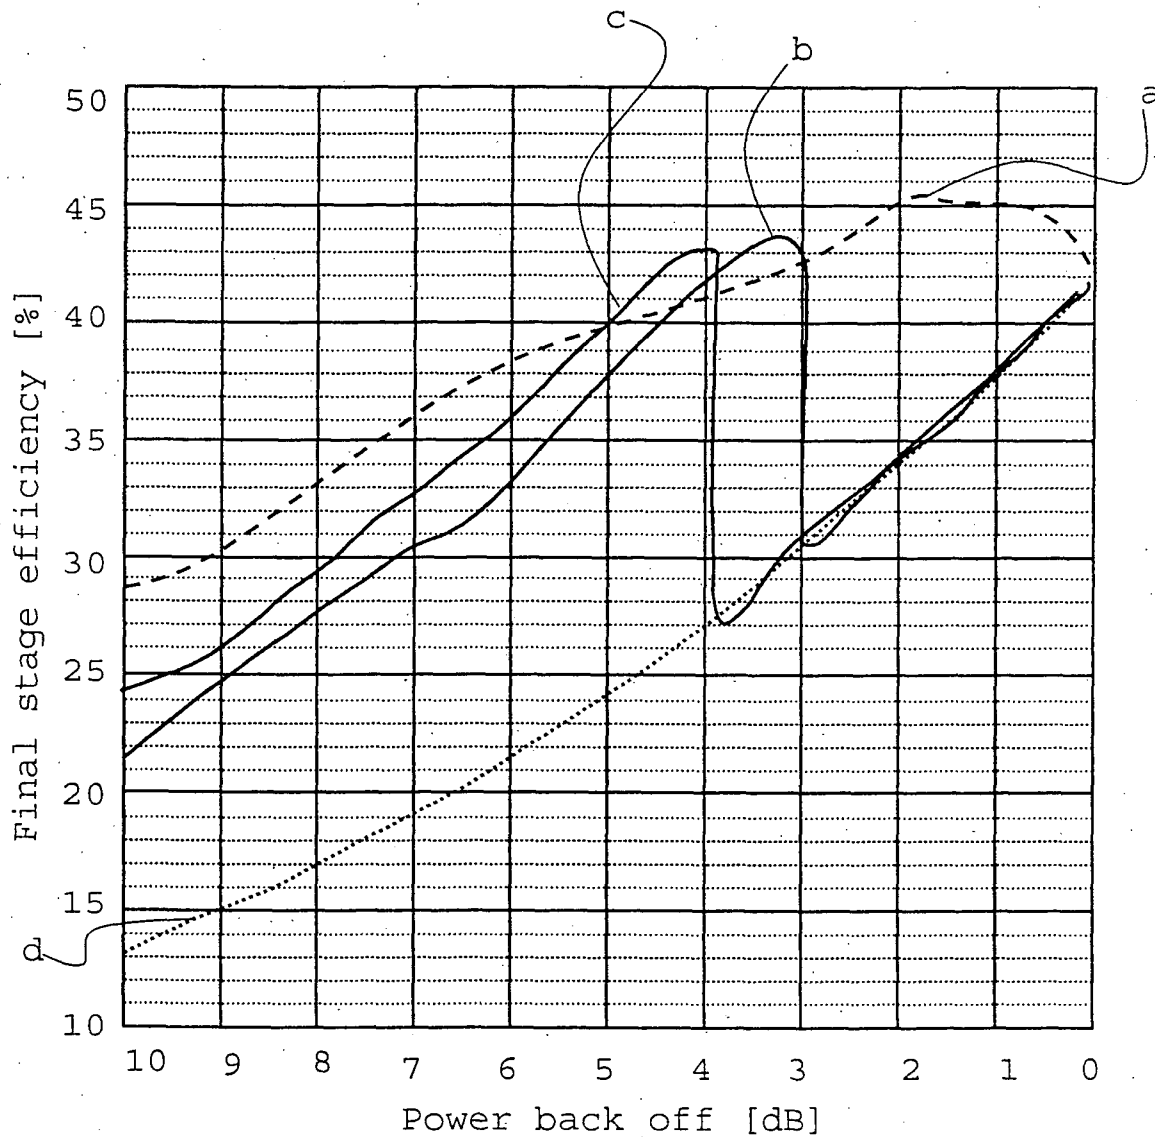

- a) 400mA, var.supply, onboard Z_a
- b) 400mA, swi.supply at 3dB back off, var. P_{in}
- c) 400mA, swi.supply at 4dB back off, var. P_{in}
- d) 400mA, 26V supply, onboard Z_a


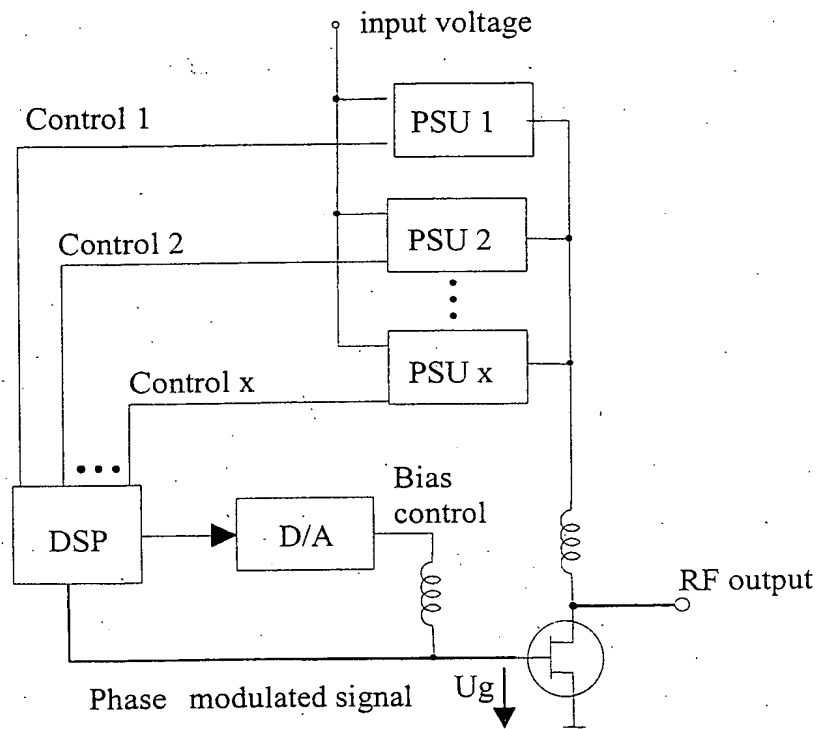
Fig. 3

Fig. 4

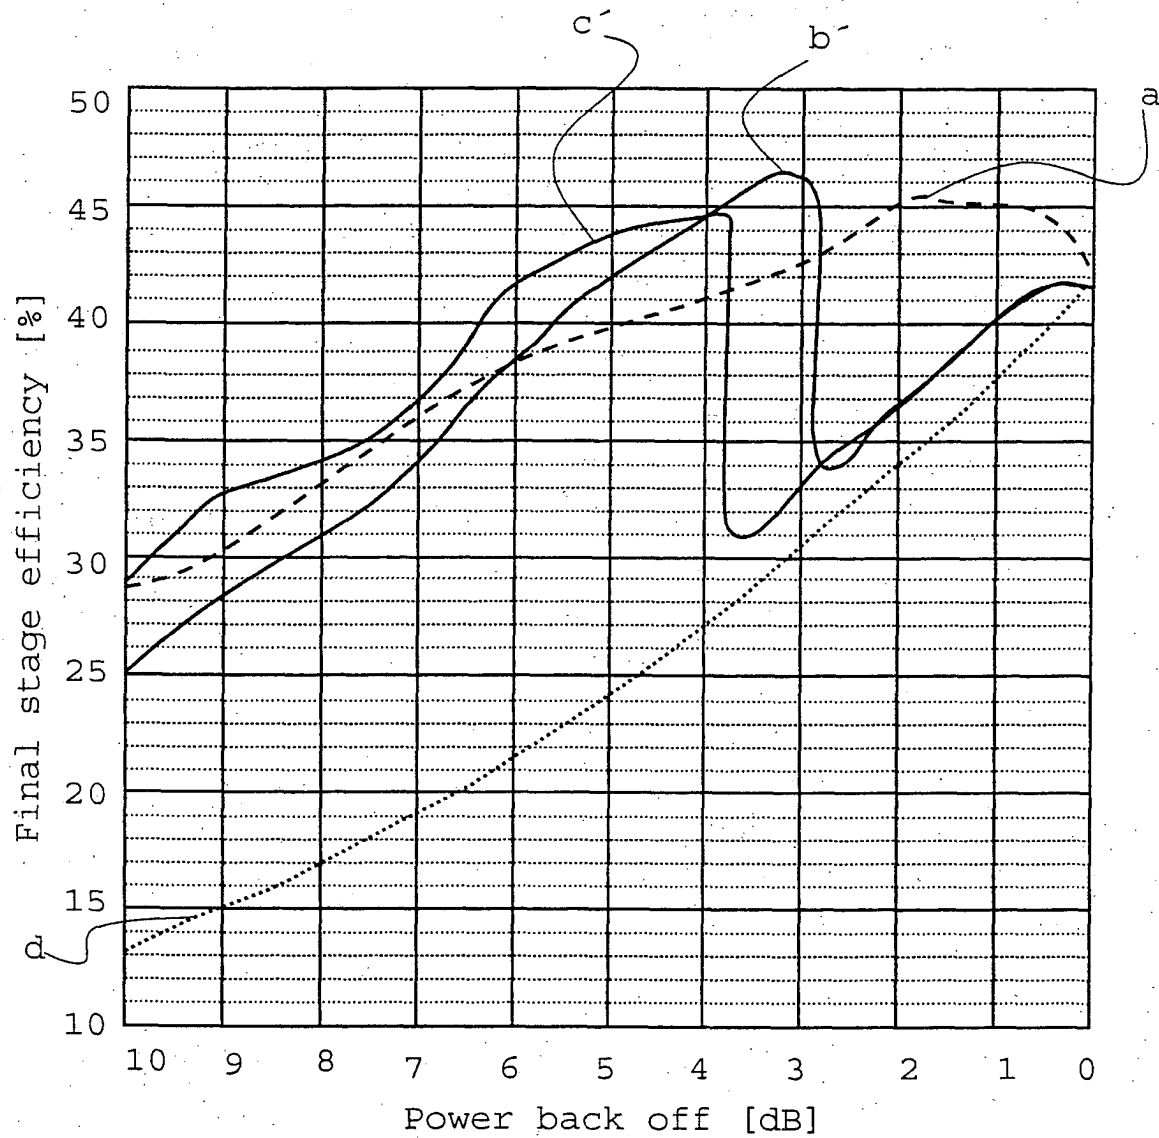

- a) 400mA, var.supply,onboard Z_a
- b) 400mA, swi.supply at 3dB back off, var. U_g
- c) 400mA, swi.supply at 4dB back off, var. U_g
- d) 400mA, 26V supply,onboard Z_a